




# TECHNICAL DATASHEET

## Topla Top

ORDER INFORMATION	
Short code	TT66H
TAB ID	118666
DIN marking	56649 SMF
Quantity per EUR/CNT pallet	57/90 Pcs
TECHNICAL INFORMATION	
Voltage	12 V
Capacity C20	66 Ah
CCA -18°C EN	640 A
DIMENSION AND WEIGHTS	
Length/Width/Height	242x175x190 mm
Lead weight	8.4 kg
Electrolyte weight	5.3 kg
Total weight	15.0 kg
TECHNOLOGY	
Type	Flooded
Grid type	Expanded
Grid alloy	Ca/Ca
Separator	PE
Electrolyte	1.28 g/cm <sup>3</sup>
BOX DESIGNS	
Container type	L2
Colour	Black
Polarity	0
Base hold down	B13
Cover type	SMF
Layout	0
Terminal	1

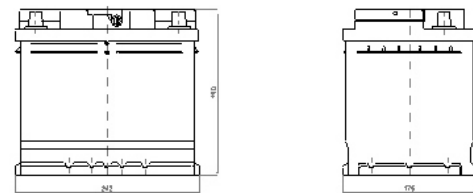

### Base hold down



### Layout

