

EcoDry Stop & Go AGM

ORDER INFORMATION

| | |
|-----------------------------|-----------|
| Short code | AG70 |
| TAB ID | 213070 |
| DIN marking | L3 AGM ED |
| Quantity per EUR/CNT pallet | 48/80 Pcs |

TECHNICAL INFORMATION

| | |
|--------------|-------|
| Voltage | 12 V |
| Capacity C20 | 70 Ah |
| CCA -18°C EN | 760 A |

DIMENSION AND WEIGHTS


| | |
|---------------------|----------------|
| Length/Width/Height | 278x175x190 mm |
| Lead weight | 15.0 kg |
| Electrolyte weight | 4.2 kg |
| Total weight | 20.5 kg |

TECHNOLOGY


| | |
|-------------|------------------------|
| Type | Flooded |
| Grid type | Expanded |
| Grid alloy | Ca/Ca |
| Separator | PE |
| Electrolyte | 1.28 g/cm ³ |

BOX DESIGNS

| | |
|----------------|--------|
| Container type | L3 |
| Colour | Black |
| Polarity | 0 |
| Base hold down | B13 |
| Cover type | Kamina |
| Layout | 0 |
| Terminal | 1 |

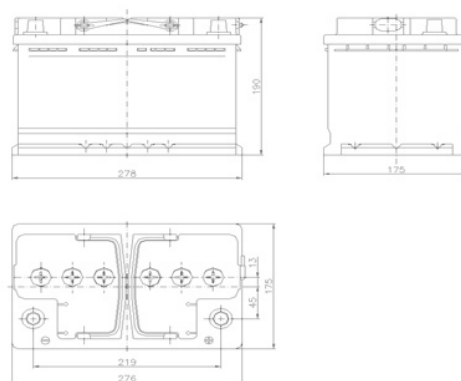

Base hold down



Layout

